



微型压式传感器 / Miniature Compression Force Sensor

LFC-8

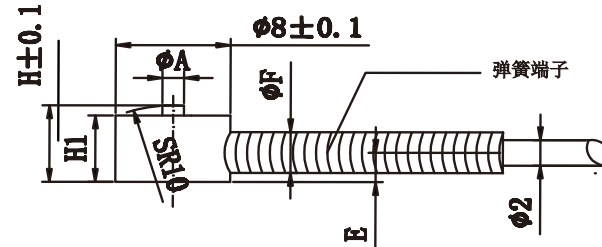

NO.	量程Capacity	Φ A	LFC-8-H6				LFC-8-H3.5						
			H	H1	E	F	H	H1	E	F			
1	3kg	1	6	5.2	2.3	3.2	3.5	3	1.35	0			
2	3, 5, 10kg	1.5											
3	20, 30kg	2											
4	50, 100kg	2.5								50, 100kg不可做H3.5			

VOOPB OCSAJUOOO OCB/OIP



量程 Capacity	0~100kg	材质 Material	不锈钢 Stainless Steel
输出灵敏度 Rated Output	0-5kg 0.5 mV/V	输出阻抗 Output Impedance	350 ± 3 Ω
	10-100kg 1.0-1.5mV/V	绝缘电阻 Insulation	≥5000MΩ/100VDC
零点输出 Zero Balance	± 2 % F.S.	使用电压 Recommended Excitation	3-5V
非线性 Non-linearity	1.0 ~ 5.0 % F.S.	最大使用电压 Maximum Excitation	5V
滞后 Hysteresis	1.0 ~ 5.0 % F.S.	温度补偿范围 Compensated Temp Range	- 10 ~ 60 °C
重复性 Repeatability	1.0 ~ 5.0 % F.S.	工作温度范围 Operating Temp Range	- 20 ~ 80 °C
蠕变 (30分钟) Creep (30min)	0.1~ 0.5% F.S.	安全超载 Safe Load Limit	150%
温度灵敏度漂移 Temp Effect on Output	0.1 % F.S. / 10°C	极限超载 Ultimate Load Limit	200%
零点温度漂移 Temp Effect on Zero	0.1 % F.S. / 10°C	电缆线尺寸 Cable Size	Ø 2 x3m
输入阻抗 Input Impedance	350 ± 10Ω		
电缆线连接方式 Wire Connection	Ex + : 红 Red; Ex - : 黑 Black; Sig + : 绿 Green; Sig - : 白 White		
主要应用 Applications	按键手感度测试仪, 冷热压机压力检测, 机器人手抓力等安装空间小的力值检测领域 Force measurement in small space installation, such as feeling tester for keyboard switch, compression force measurement for hot and cold lamination machine, and grasping force measurement for robotic hands		